



caroma®

INSTALLATION INSTRUCTIONS PLEASE READ CAREFULLY BEFORE INSTALLATION

FAUN WALL BASIN

FAUN 450 WALL BASIN INSTALLATION

Procedure D.200 Fixing Kit (supplied)

IMPORTANT

Roughing in for bracket :

For timber stud walls, noggings and studs must be positioned at a height to allow for the location of fasteners in the detailed centre fixing position for the bracket option available for the Faun Wall Pedestal basin. The centre position is detailed in **Figure 2**.

Roughing in for Shroud:

To conceal plumbing install inlet connection as detailed in **Figures 1 and 2**.

BASIN INSTALLATION WITH D.200 FIXING KIT


- 1- Mark fixing hole centres on finished wall at the recommended height as detailed in **Figure 2**.
- 2- Drill two Ø12mm holes in masonry wall for expansion fasteners. For timber stud walls drill two Ø8mm holes for Lag Screws.
- 3- Insert expansion fasteners into the drilled holes if required. Screw Lag Screw into the wall using the flats located on the screw section of the stud and spanner as shown in **Figure 5**. Allow 38mm of thread to protrude from the finished wall.
- 4- Fit taps and waste assembly to the basin.
- 5- Locate basin onto the Lag Screws on the wall. Insert plastic bushes, metal washers and fasten to wall with fixing nut. To complete assembly as detailed in **Figure 4**.
- 6- The Plastic Bush allows for leveling adjustment if required by rotating the hexagonal head bush, the basin will be slightly raised or lowered as shown in **Figure 4**.
- 7- Tighten fixing nuts and connect plumbing to complete the installation.

SHROUD INSTALLATION

For installations using the D.200 Fixing Kit, locate links on to lag screws and fit fixing springs as shown in **Figure 6**.

- 1- Ensure basin is secured to bracket and plumbing is connected.
- 2- **Position shroud to underside of basin and pull down springs with two fingers as detailed in Figure 6** to locate into holes at the side of the shroud.
- 3- Check shroud is tensioned and secured against basin. The tension of the spring is adjusted by moving its location in the hole in the link.

Faun 450 Wall Basin



Shroud Inlet Detail




Fig 1

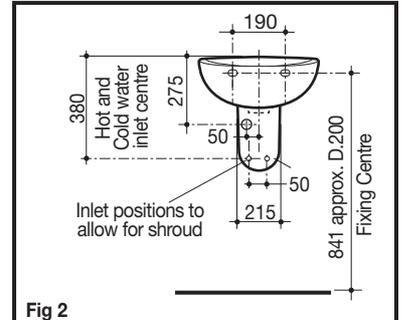


Fig 2

P-Trap Set-out for Shroud




Fig 3 **Important: Accurate P-trap set-out for shroud is essential**

D.200 Fixing Kit




Fig 4

Lag Screw Fixing




Fig 5

Shroud Installation with D.200 Fixing Kit





Fig 6

D.210 Concealed Fixing Clip Assembly

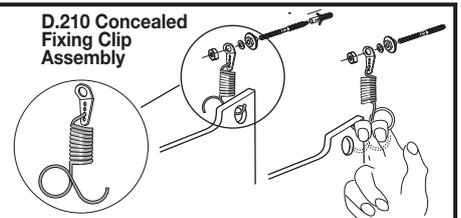

**THIS INSTALLATION INSTRUCTION
SUPERSEDE INSTALLATION
INSTRUCTION PRINTED ON THE
CARTONS.**

All measurements are subject to accepted manufacturing tolerances.
To ensure accuracy please check actual product dimensions before drilling for installation.
The manufacturer reserves the right to change specifications at any time without giving prior notification.
This product should be installed by a qualified plumber. Local Authority, Water Board, and Building Regulations may apply to the installation of this product, and you should consult the appropriate bodies on these requirements.

Issue No: 4
Date of Issue: 06.12.11