

PLUMBERS INSTALLATION INSTRUCTIONS

Important Information

- * For warranty details refer to www.clark.com.au
- * Showerhead and shower arms are sold separately.
- * Not suitable for gravity feed systems.
- * The showerhead is fitted with a flow regulator. The lower flow rate may not be suitable for connection to some gravity fed Water Heaters, some low pressure supply networks, some Instantaneous Water Heaters, some Tempering Valves, some Solar Water Heaters & some Thermostatic Mixing Valves. Check with the manufacturers of these products.
- * All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow regulating device and reduce the flow of water.

Installation

- 1) Check that threaded nipple (2) is the correct length, as shown. Cut to length if required ensuring end face is square. Apply thread tape to the thread.
Important : Care must be taken that thread tape cannot become dislodged and block the flow regulating device, causing a reduction in water flow. Place the cover plate (1) over the threaded nipple (2). Screw the shower arm (3)⁺ onto the threaded nipple (2) and position as required. DO NOT OVERTIGHTEN.
- 2) Ensure washer (4) and flow regulator (5) are fitted to the inlet socket of the showerhead (5), as shown. Screw the G1/2 inlet thread of the shower head (6) onto the arm (3)⁺ and tighten using a suitable spanner, taking care not to damage the decorative finish. DO NOT OVERTIGHTEN.

IMPORTANT	
<u>Pressure & Temperature Requirements.</u>	
•	Hot and cold water inlet pressures should be equal.
•	Static inlet pressure range : 150 -1000 kPa New Regulation :-500 kPa maximum operating pressure at any outlet within a building. (Ref. AS/NZS 3500.1)
•	Maximum hot water temperature : 80°C.

⁺ Shower arms are sold separately.

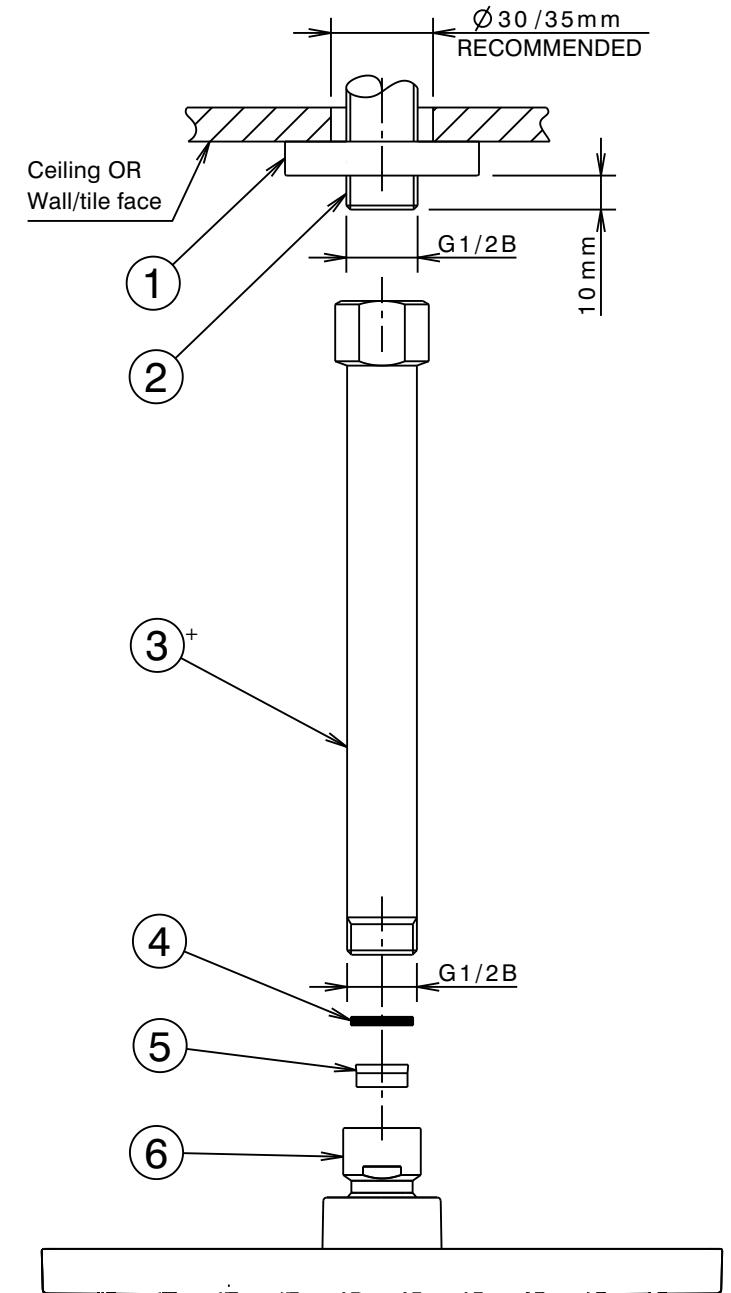


Fig. 1